


APDatec 142

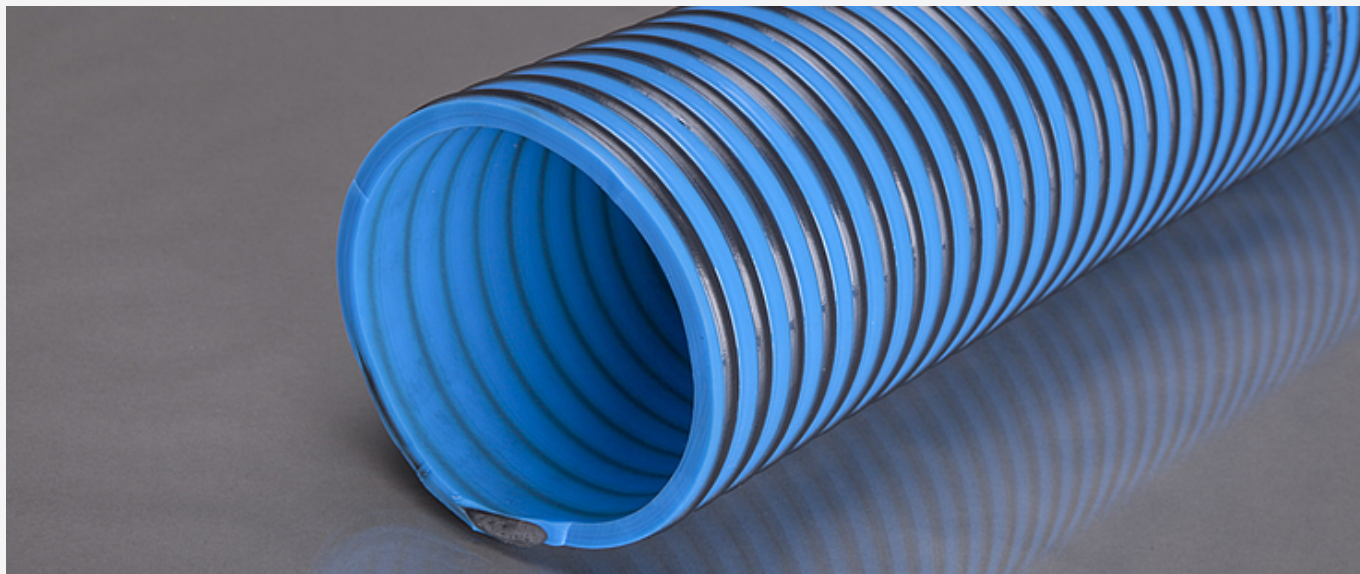

Imprint

with imprint

Durability

refer to Soft PVC

Colour

blue with black spiral

Food approval

No

REACH

conformity to 1907/2006/EC

RoHS

Conformity to Guideline 2015/863 (RoHS 3)

Spiral

Rigid-PVC

Material

Soft-PVC

empty

142.JPG

important advices

For proper use of our products please note

Interesting facts about hoses

All technical Data are according to ISO-Standard and at 20 °C ambient and medium temperature, technical changes reserved.

APDatec 142

Nr.	Inside Diameter in mm	Outside Diameter in mm	Wall Thickness	Bending Radius	Working Pressure bar	Vacuum mmH2O	Length in m	Weight per Piece
142 051 0500	51	61,4	5,2	160	5	0,88	50	52
142 076 0500	76	87,6	5,8	250	4	0,88	50	85
142 080 0500	80	91,6	5,8	260	4	0,88	50	90
142 102 0500	102	116,4	7,2	320	3	0,88	50	137,5
142 110 0500	110	125	7,5	350	3	0,88	50	150
142 125 0250	125	140,6	7,8	400	3	0,88	25	90
142 125 0300	125	140,6	7,8	400	3	0,88	30	
142 152 0250	152	170	9	500	3	0,88	25	131,5
142 203 0250	203	224	10,5	1.015	2	0,88	25	182,5