


APDatec 248 ProSlide PU

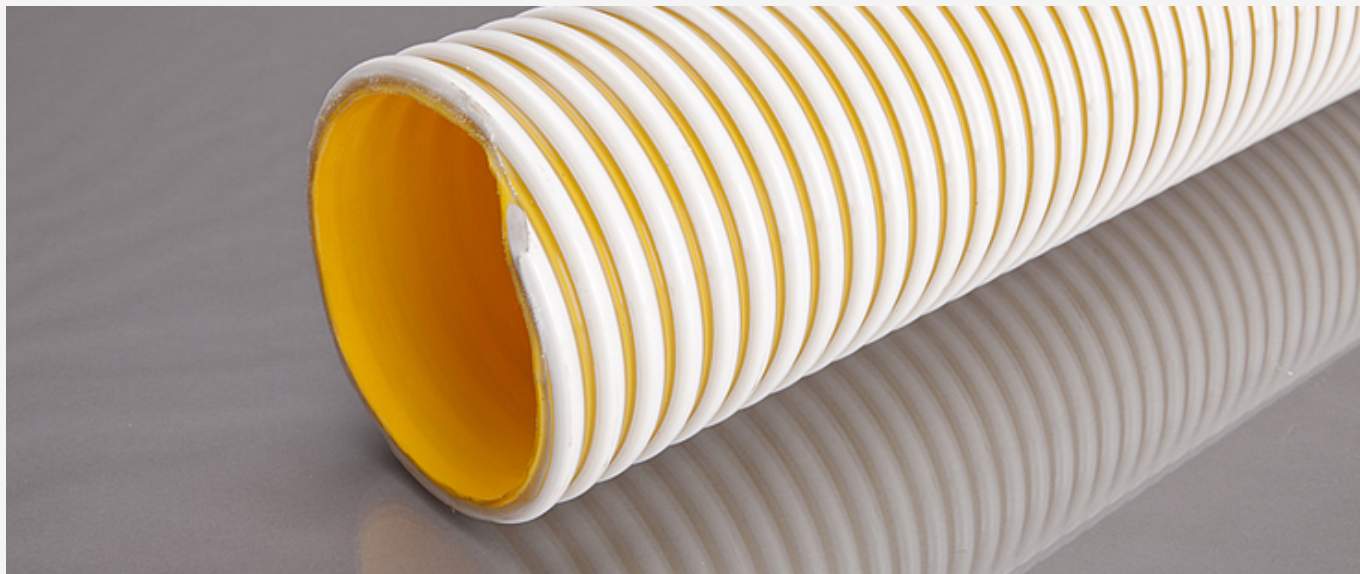

Imprint

with imprint

Durability

refer to Polyesterurethane

Colour

yellow inside, grey spiral

Food approval

No

REACH

conformity to 1907/2006/EC

RoHS

Conformity to Guideline 2015/863 (RoHS 3)

Spiral

Rigid-PVC

Material

Soft-PVC with PU-Liner

empty

248.JPG

important advices

For proper use of our products please note

[Interesting facts about hoses](#)

All technical Data are according to ISO-Standard and at 20 °C ambient and medium temperature, technical changes reserved.

APDatec 248 ProSlide PU

Nr.	Inside Diameter in mm	Outside Diameter in mm	Wall Thickness	Bending Radius	Working Pressure bar	Vacuum mmH2O	Length in m
248 080 0300	80	94	7	560	3	0,88	30
248 102 0300	102	118	8	612	4	0,88	30
248 127 0300	127	145	9	825	3	0,88	30
248 152 0200	152	173	10,5	1.064	2	0,88	20