


APDatec 635

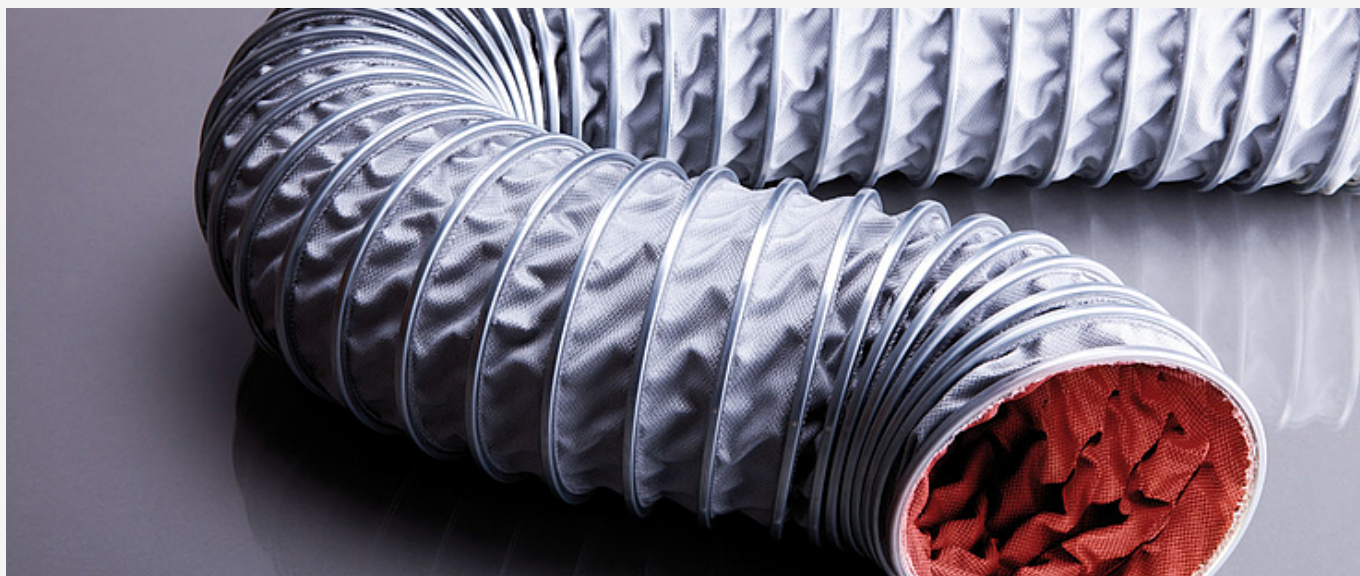

Colour

grey

Food approval

No

REACH

conformity to 1907/2006/EC

RoHS

conformity to RoHs

Spiral

Clamping profil out of galvanised steel

Material

Special coated high temperature glass fabric

empty

635.JPG

important advices

For proper use of our products please note

Interesting facts about hoses

All technical Data are according to ISO-Standard and at 20 °C ambient and medium temperature, technical changes reserved.

APDatec 635

Nr.	Inside Diameter in mm	Bending Radius	Vacuum mmH2O
635 0050	50	60	0,37
635 0060	60	71	0,26
635 0070	70	83	0,19
635 0075	75	89	0,17
635 0080	80	95	0,15
635 0100	100	124	0,09
635 0120	120	149	0,07
635 0125	125	155	0,06
635 0140	140	174	0,05
635 0150	150	158	0,04
635 0160	160	169	0,04
635 0175	175	185	0,03
635 0180	180	190	0,03
635 0200	200	191	0,02
635 0250	250	239	0,02
635 0275	275	262	0,01
635 0300	300	258	0,01
635 0350	350	301	0,01
635 0375	375	323	0,01
635 0400	400	344	0,01
635 0450	450	360	0,01
635 0500	500	400	0,004
635 0550	550	440	0,003
635 0600	600	480	0,003
635 0700	700	560	0,002
635 0800	800	639	0,002
635 0900	900	719	0,001
635 1000	1.000	799	0,001