


Flexacier LT

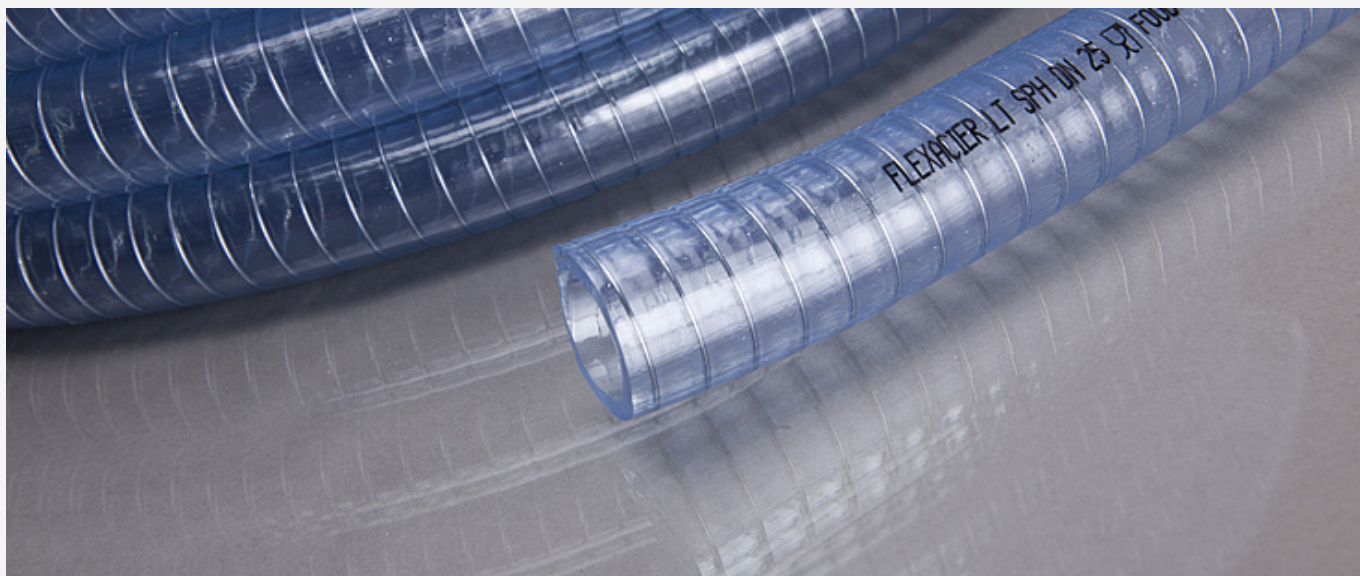

Imprint

with imprint

Durability

refer to Soft PVC

Colour

transparent

Food approval

conformity to EU 10/2011 A, B, C,

REACH

conformity to 1907/2006/EC

RoHS

conformity to RoHS

Spiral

Spiral out of Steel

Material

Soft-PVC

empty

28.JPG

important advices

For proper use of our products please note

Interesting facts about hoses

All technical Data are according to ISO-Standard and at 20 °C ambient and medium temperature, technical changes reserved.

Flexacier LT

Nr.	Inside Diameter in mm	Outside Diameter in mm	Wall Thickness	Bending Radius	Working Pressure bar	Vacuum mmH2O	Length in m	Weight per Piece
28 010 0600	10	16	3	20	11	0,88	60	9,6
28 012 0600	12	18	3	25	10	0,88	60	10,8
28 013 0500	13	19	3	25	10	0,88	60	11,7
28 014 0600	14	20	3	25	10	0,88	60	12,3
28 016 0600	16	23	3,5	30	10	0,88	60	13,5
28 018 0600	18	25,2	3,6	32	8	0,88	60	18
28 019 0600	19	26,4	3,7	34	8	0,88	60	18,9
28 020 0600	20	27,6	3,8	35	8	0,88	60	19,8
28 022 0600	22	29,2	3,6	40	8	0,88	60	
28 025 0600	25	33	4	42	8	0,88	60	30
28 032 0600	32	39	3,5	53	6	0,88	60	39
28 035 0600	35	44	4,5	60	6	0,88	60	42
28 038 0300	38	47	9,5	70	5	0,88	30	24
28 040 0500	40	50	5	150	5	0,83	50	
28 051 0300	51	61	5	100	4	0,80	30 mtr.	36 kg