


GreenX OneFlat Premium

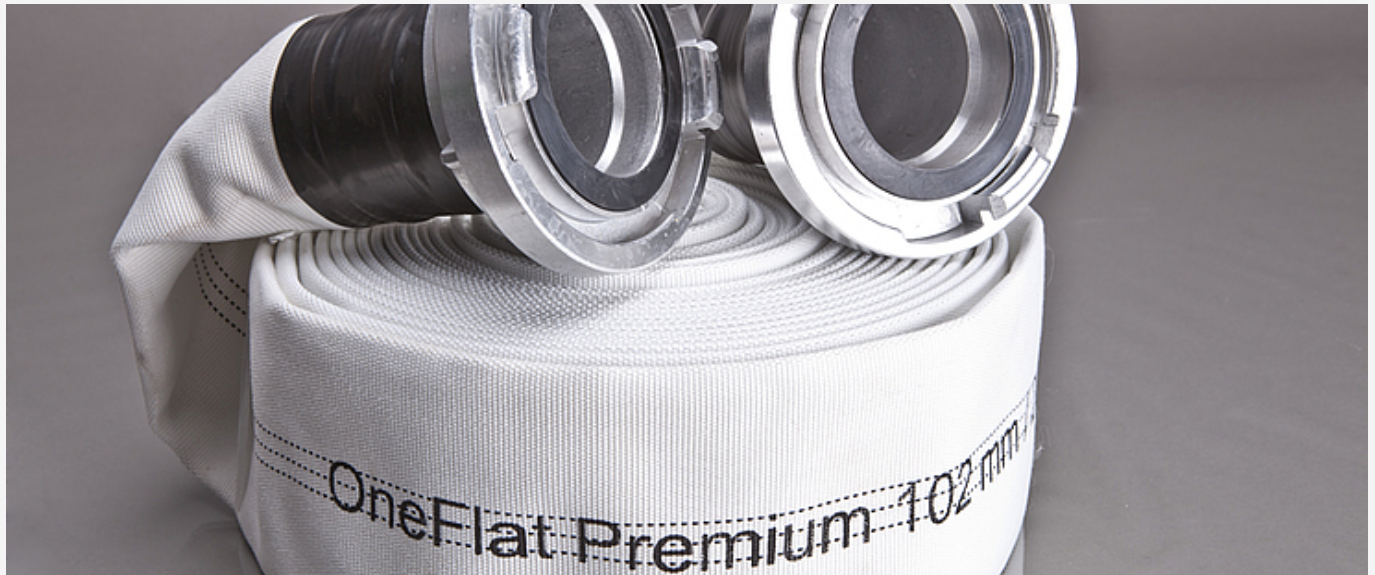

Flat construction hose made of polyester fabric, EPDM-coated on the inside. Pre-connected with APD Connect aluminium Storz couplings. End protection sleeves. Very high compressive strength, good abrasion resistance, very robust. Other lengths and diameters on request. Packaging: individually in carton.

Inside EPDM rubberized, very flexible, highly abrasion and rot-proof.

Applications: In the construction and industrial sector. For pumping out water, e.g. in case of floods or on construction sites. As pressure hose after the pump in flood boxes.

Imprint

with imprint

Durability

refer to EPDM

Colour

white

Yarn

Polyester fabric

REACH

conformity to 1907/2006/EC

RoHS

conformity to RoHS

Inside Material

EPDM, schwarz, glatt

empty

188.JPG

important advices

For proper use of our products please note

[Interesting facts about hoses](#)

All technical Data are according to ISO-Standard and at 20 °C ambient and medium temperature, technical changes reserved.

GreenX OneFlat Premium

Nr.	Inside Diameter in mm	Working Pressure bar	Bursting Pressure bar	Length in m	Fitting	kg/Piece
1880520200	51	13	40	20	Storz coupling Typ C = 51 mm	5,32
1880760200	76	13	40	20	Storz coupling Typ B = 76 mm	8,36
1881020200	102	13	40	20	Storz coupling Typ A = 102 mm	13,26